

Features & Advantages


- Auto Clean Technology with self-cleaning electrolytic cell.
- High Efficiency toroidal transformer.
- Over temperature and over current protection.
- External reset button available.
- LED light indicator for reverse polarity and warning light for water fault.
- Low sale operation: 3500 to 4500ppm.
- Technically advanced digital micro processing PCB.
- Premium grade long life electrolytic cell.
- Energy efficient low kW consumption.

Warranty

MINDER chlor	1 year

MINDER Chlor Chlorine Generator is engineered for reliability and easy operation. Electrolytic chlorine generation is the most effective and convenient way to maintain clean pool water. It has the same sanitation performance as manual chlorine dosing without the need to buy, transport and store expensive chlorine compounds.



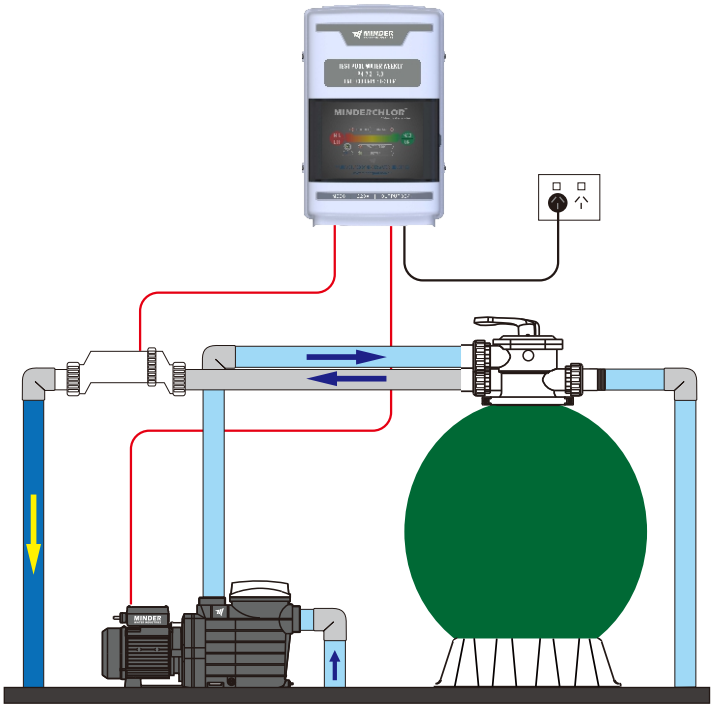

Ideal Operating Condition


pH	7.2 - 7.4
Total Alkalinity	90ppm - 150ppm
Cyanuric Acid	40ppm - 65ppm
Salt	4000 ppm
Chlorine	1.5ppm - 2.0ppm


All specifications are only for reference. Actual product performance may vary. Product's colours and specifications are subject to change without prior notice.

Specification

MODEL	CODE	VOLTAGE	POWER	SALINITY	MAX CHLORINE OUTPUT		CONNECTION SIZE	MAX POOL SIZE	WATERPROOF GRADE
			w	ppm	g/h	ml/h	Inch	m^3	
MC20	90154	220-240V 50/60Hz	200	3500 - 4500	20	200	1.5" - 2.0"	65	IP24
MC25	90155		200		25	250		80	
MC30	90156		350		30	300		100	

Dimensions (mm)

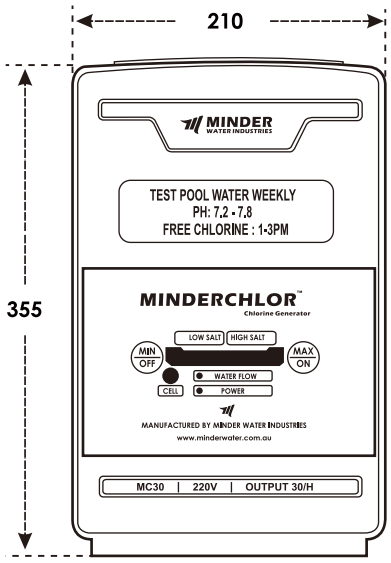


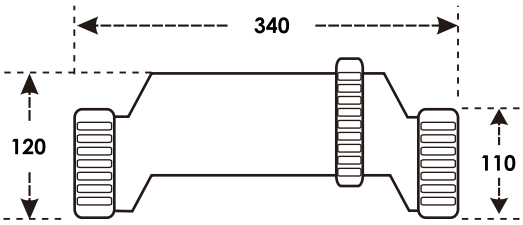

Choose your MINDER chlor™

1. Determine your pool size (in thousand litres)
2. Move horizontally until you reach your climate zone
3. Do down to determine the amount of chlorine you require
4. If you budget allows, add extra 10-20%
5. In commercial installations, allow at least 100% extra

Chlorinator Sizing Chart

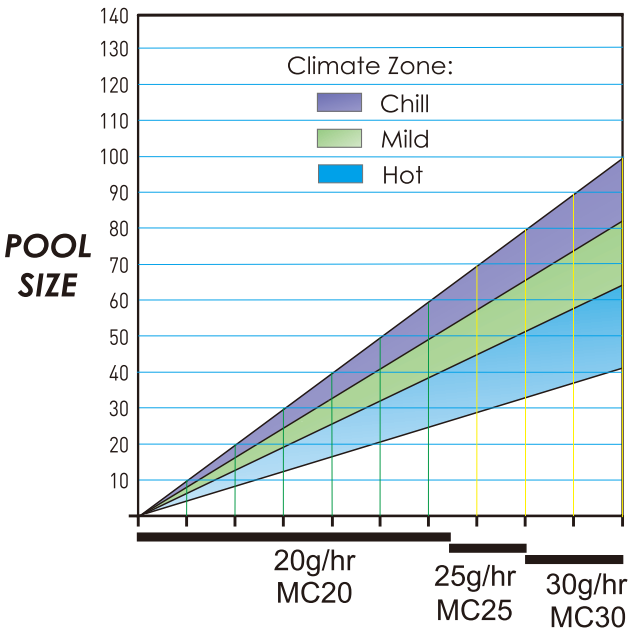

All specifications are only for reference. Actual product performance may vary. Product's colours and specifications are subject to change without prior notice.