
MINDER WATER INDUSTRIES

QS SERIES
SIDE MOUNTED LOW PRESSURE



Minder's QS series is manufactured using one-piece blow-moulded technology. Low pressure operation means it is more affordable to everyone.

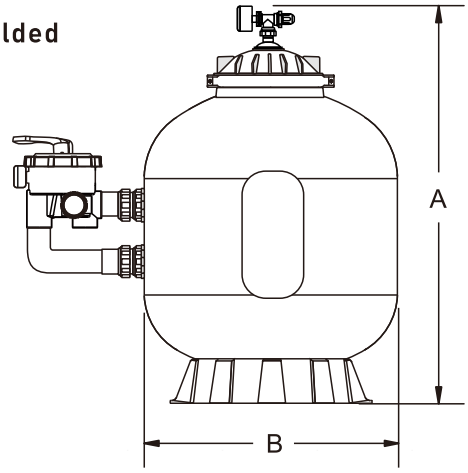

Operating Limits

Maximum water temperature	43 ℃
Operating Pressure	1.0bar
Maximum Pressure	2.5bar

Material

Tank: HDPE
MPV: ABS
Clamp: PA66
Base: PP

Specification

MODEL	CODE	MULTIPORT VALVE UNION SIZE		HEIGHT A	TANK Ø B	FILTRATION AREA	DESIGNED VELOCITY	MAX FLOW RATE		MEDIA BED DEPTH	SILICA SAND (kg)
	2.5bar	IMPERIAL	METRIC	mm	mm	m^2	$m^3/h/m^2$	m^3/h	lpm	mm	1-2mm
QS21	72867	1.5	50mm	745	550	0.22	48	12	200	340	85
QS25	72868			875	650	0.33		16	267	400	155

QS series is approved by "Greener Production" scheme

Cleaner Production (CP) Scheme is an adoption of clean production technologies to reduce emissions and achieve greater energy efficiency.

All specifications are only for reference. Actual product performance may vary. Product's colours and specifications are subject to change without prior notice.