HEAT
EXCHANGER

MINDER
WATER INDUSTRIES



Features & Advantages


- Maximum working temperature of 110℃ (104℃).
- Maximum working pressure 1000kpa.
- High quality corrosion resistant stainless steel AISI-316.
- Rolled formed to shape and precision welded.
- Designed to minimize pressure loss in the heating system.
- Suitable for all types of swimming pools, spas, and hot tubs.

Warranty

Heat Exchanger	1 year

Specification

MODEL	CODE	CAPACITY		HOT WATER	POOL WATER FLOW	POOL SURFACE
		KW	Btu/h	L/min	L/min	m^3
MDW-80	95000	25	95	30	25	30
MDW-135	95001	40	135	25	200	30-60
MDW-200	95002	60	200	30	250	60-75
MDW-260	95003	75	260	35	300	75-115
MDW-400	95004	120	400	50	360	115>

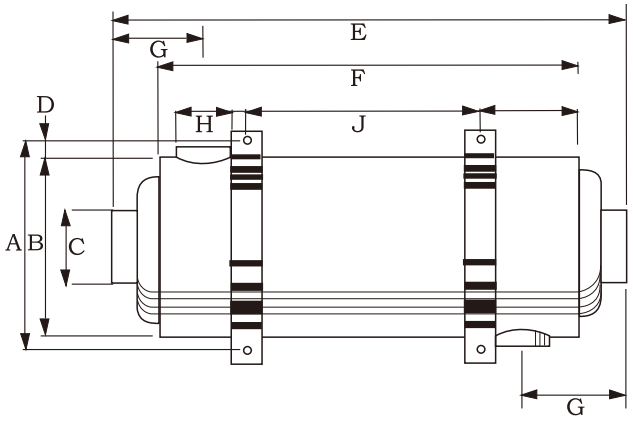

All bracket holes 1/4" I.D.

Dimensions

MODEL	A	B	C	D	E	F	G	H	J
	mm								
MDW - 80	$5^{1/2"}$	$5^{1/8"}$	1"	¼"	11"	9"	$2^{1/4"}$	$1^{1/4"}$	5"
MDW - 135	$5^{1/2"}$	$5^{1/8"}$	1"	¼"	$13^{1/2"}$	11"	3"	$1^{1/2"}$	4"
MDW - 200	$5^{1/2"}$	$5^{1/8"}$	1"	¼"	$18^{3/4"}$	16"	3"	$1^{1/2"}$	9"
MDW - 260	$5^{1/2"}$	$5^{1/8"}$	1"	¼"	$23^{3/4"}$	$21^{1/4"}$	3"	$1^{1/2"}$	14"
MDW - 400	$5^{1/2"}$	$5^{1/8"}$	1"	¼"	$41^{3/4"}$	$39^{3/8"}$	$3^{1/2"}$	2"	$31^{1/2"}$

All specifications are only for reference. Actual product performance may vary. Product's colours and specifications are subject to change without prior notice.