



Features & Advantages

- **Toughness** - Engineered for long hours operations.
- **Swap & Go** - Wet-end and motor can be easily detached on site. Just swap either component when service is required and let the system keep running to reduce down time.
- **Robust** - Unique flange connections both in Inlet and Outlet for extra stability.
- **Convenient** - Extra-large basket for long intervals between cleaning.
- All models come with flange connection 65mm Inlet and 65mm Outlet.
- Optional Shock absorber (Product Code: 90576) is available.
- **Self - priming** at 2m
- Enclosure Class is IP55 & Insulation Class is F.

Warranty

Pump body and plastic components	2 years
Motor, O-rings and mechanical seal	1 year

MONSOON™ pump is designed for commercial swimming pools. The entire range comes with standard flange connection. With 75mm Inlet and 65mm Outlet, it offers well balance between flow rate and head. MRB series pumps are built for the toughest conditions with heavy duties motor and pump components.

Operating Limits

Maximum water temperature	50 ℃
Maximum Ambient Tempreture	50 ℃
Noise at 1 meter	65 dB

Application


- Domestic pools
- Commercial pools
- Water features



Robust plastic body




Flange connection & transparent lid

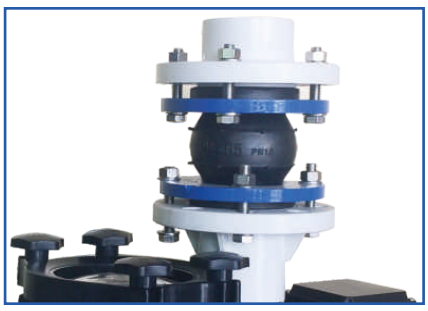

Optional shock absorber
Order code : 90576


All specifications are only for reference. Actual product performance may vary. Product's colours and specifications are subject to change without prior notice.

Specification

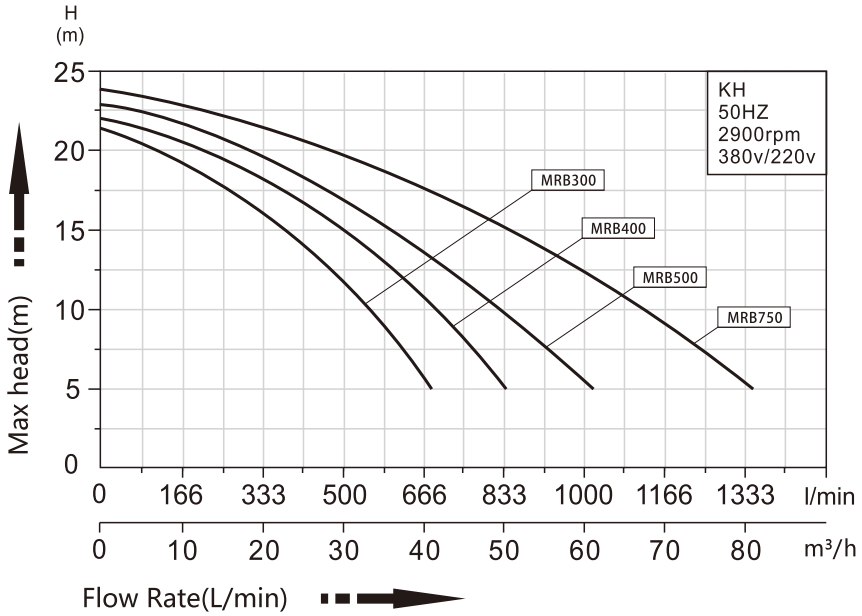

MODEL	CODE 50HZ	CONNECTIONS		VOLTAGE	PHASE	INPUT POWER	OUTPUT POWER	RPM
		INLET	OUTLET	V		kw	HP	
MRB300	70663	75mm	65mm	380 - 400	3	2.2	3	2850
MRB400	70664				3	3	4	
MRB500	70665				3	4	5	
MRB750	71036				3	5.5	7.5	

Dimensions

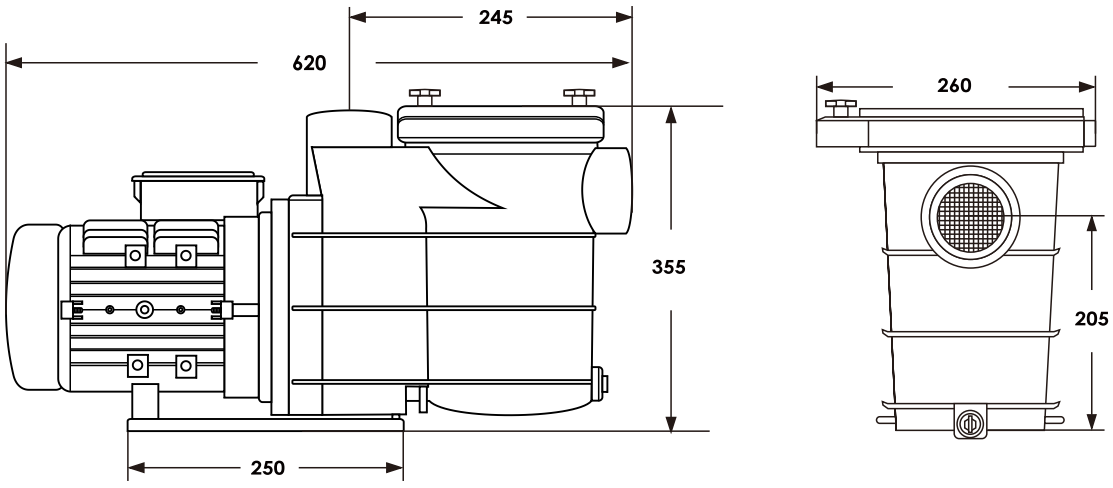

All specifications are only for reference. Actual product performance may vary. Product's colours and specifications are subject to change without prior notice.