MTX SERIES PUMP





Features & Advantages

- **Reliable** - Constructed from corrosion resistant engineered plastic for long working lide.
- **Sea Water** - Appropriate especially for sea water application such as in Aquarium.
- **High Performance** - Maximum flow rate up to 110m³/h.
- All models come with union connection 90mm.
- **Self - priming** at 2m
- Enclosure Class is IP55 & Insulation Class is F.

Warranty

Pump body and plastic components	2 years
Motor, O-rings and mechanical seal	1 year

MINDER TORNATO™ pump, with maximum of 15hp, is designed for commercial pools and aquariums. The wet-end components are constructed from corrosion, high and low temperature resistant engineered plastic for long operation life. All models come with 3" union (Imperial or Metric).

Operating Limits

Maximum water temperature	50 ℃
Maximum Ambient Tempreture	50 ℃
Noise at 1 meter	65 dB

Application

- Domestic pools
- Commercial pools
- Aquariums



Transparent Lid




Robust plastic body
for high power pump



Easy union connection
union 3" / 90mm
20651


All specifications are only for reference. Actual product performance may vary. Product's colours and specifications are subject to change without prior notice.

Specification

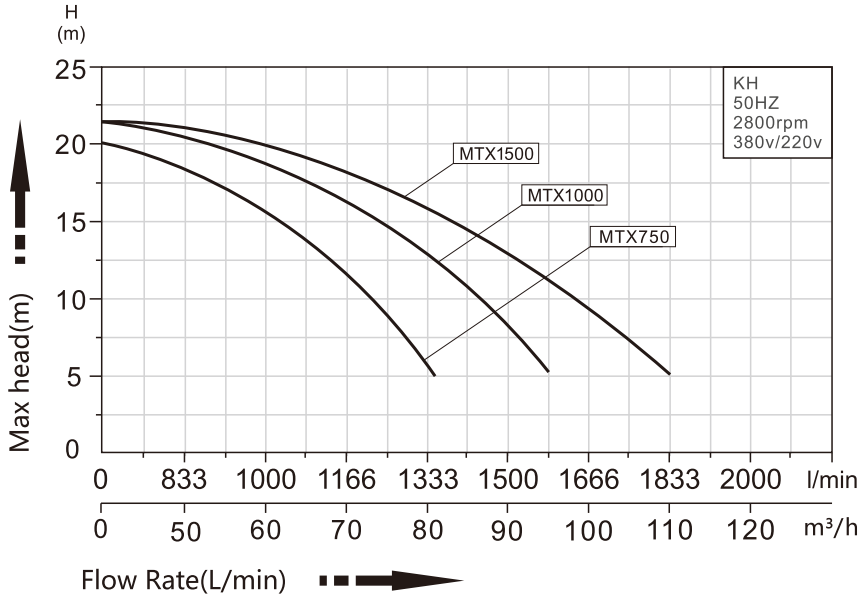

MODEL	CODE 50HZ	CONNECTIONS		VOLTAGE	PHASE	INPUT POWER	OUTPUT POWER	RPM
		IMPERIAL	METRIC	V		kw	HP	
MTX750	90722					5.5	7.5	
MTX1000	90723	3.0"	90mm	380 - 400	3	7.5	10	2850
MTX1500	90724					11	15	

Dimensions

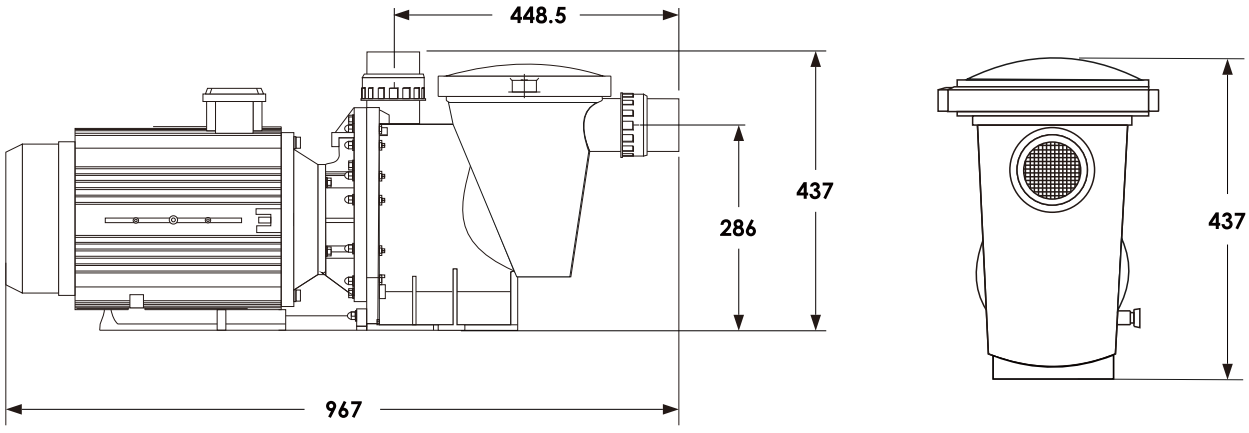

All specifications are only for reference. Actual product performance may vary. Product's colours and specifications are subject to change without prior notice.